




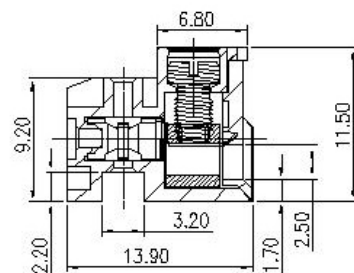

DG332W-5.0



APPROVAL

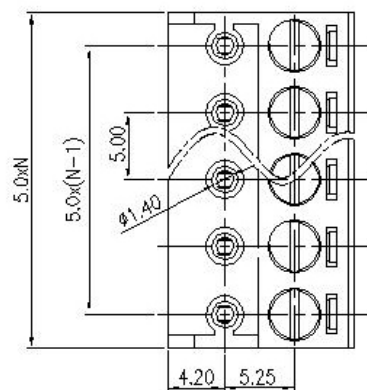

Electrical

Standard

UL

IEC

Rated voltage

300V

250V

Rated current

10A

12A

Wire range

30-16AWG

1.5mm²

Withstanding voltage

AC2000V/1Min

Mechanical

Torque

0.4Nm(3.5Lb-In)

Ambient temperature

-30°C~+120 °C

Strip length

5-6mm

Dimensions

Pitch

5.0mm(.197")

Poles

2P-12P

Material

Housing

A66,UL94V-0

Screws

M2.5,steel, Cr³⁺ Zn-plated

Contact

Phosphor bronze

Cage

Brass,Ni plated

HOW TO ORDER :

DG332W-5.0

P

☒ ☒ ☒
Customer Request



Series number

No.of pole

1 Single pitch
2 Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



THIROANGLE PROJECTION



DEGSON ELECTRONICS CO., LTD.

NAME

DG332W-5.0