

UNLOCK SAVINGS WITH SUPERIOR COMPONENT SOURCING


Benefit from our expertise in sourcing and cost reduction. Contact Diverse Electronics to enhance your procurement strategy.

SUBMIT AN RFQ TODAY



MULTI CONNECTION SYSTEM

Product Overview

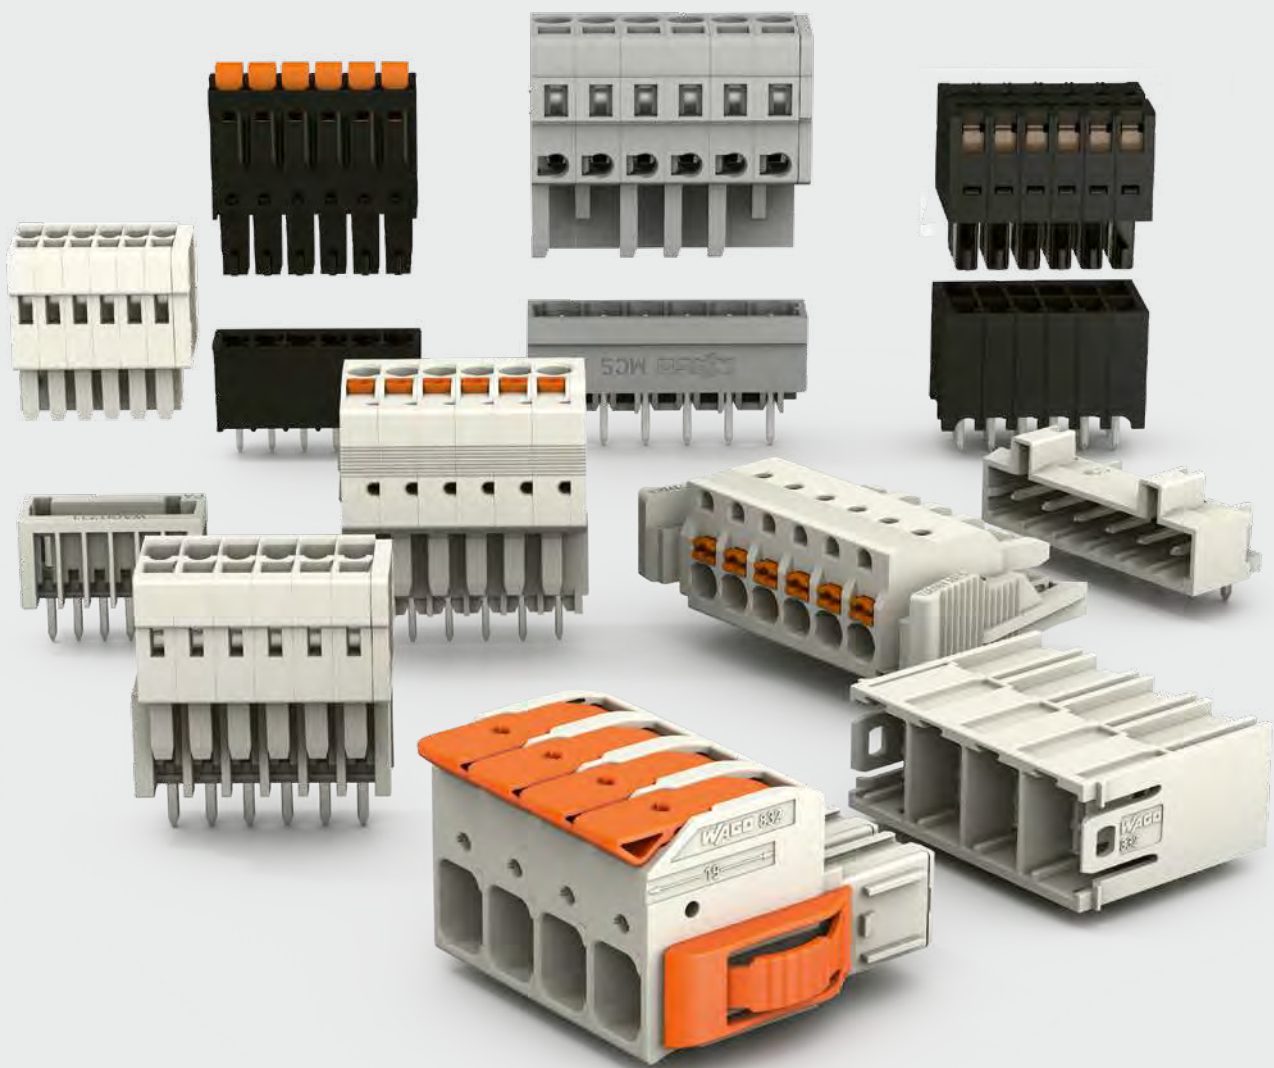

The Complete Range of *MCS* Connectors – *MULTI CONNECTION SYSTEM*


MICRO

Pin spacing: 2.5 mm

Conductor range: 0.08 mm² ... 0.5 mm²

The **"Most Compact"** MCS MICRO System with CAGE CLAMP® Connection:

- 100% protected against mismatching
- Wire-to-board and wire-to-wire connections
- Custom coding options
- The housing's polyamide insulation material allows a rated voltage up to 320 V for pin spacing as low as 2.5 mm
- Through-Hole Reflow (THR) variants

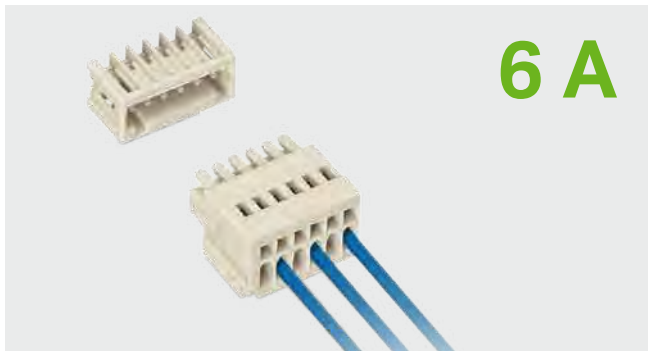


MINI

Pin spacing: 3.5 mm, 3.81 mm

Conductor range: 0.08 mm² ... 1.5 mm²

The **"Compact"** MCS MINI System with CAGE CLAMP® or Push-in CAGE CLAMP® Connection:

- 100% protected against mismatching
- Wire-to-board, wire-to-wire, board-to-board and board-to-wire connections
- Custom coding options
- Versions with integrated push-buttons
- Through-Hole Reflow (THR) variants
- Also available with press-in mounting technology

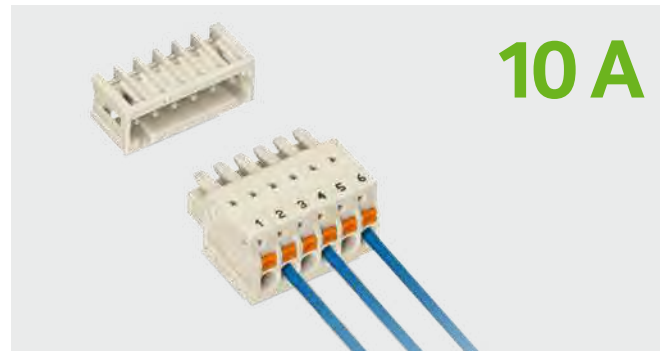


MIDI

Pin spacing: 5 mm, 7.5 mm

Conductor range: 0.08 mm² ... 2.5 mm²

The **"Versatile"** MCS MIDI System with CAGE CLAMP® or Push-in CAGE CLAMP® Connection:

- 100% protected against mismatching
- Wire-to-board, wire-to-wire, board-to-board and board-to-wire connections
- Custom coding options
- Long contact pins connect to rail-mount terminal blocks
- Versions with integrated push-buttons
- Also available with press-in mounting technology

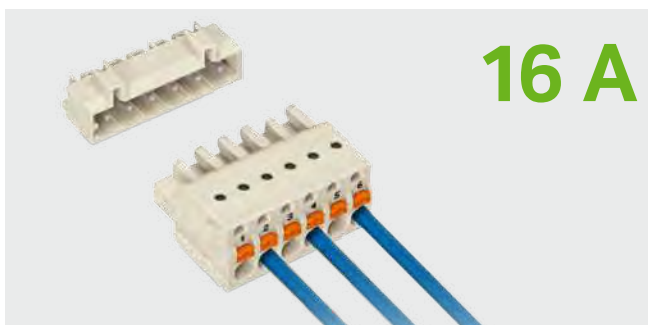


MIDI Classic

Pin spacing: 5 mm, 5.08 mm, 7.5 mm, 7.62 mm

Conductor range: 0.08 mm² ... 2.5 mm²

The **"Classic"** MCS MIDI System with CAGE CLAMP® or Push-in CAGE CLAMP® Connection:

- Group arrangement of female connectors in a single male header without loss of pin spacing
- Wire-to-board, wire-to-wire, board-to-board and board-to-wire connections
- Custom coding options
- Long contact pins connect to rail-mount terminal blocks
- Versions with integrated push-buttons
- Through-Hole Reflow (THR) variants

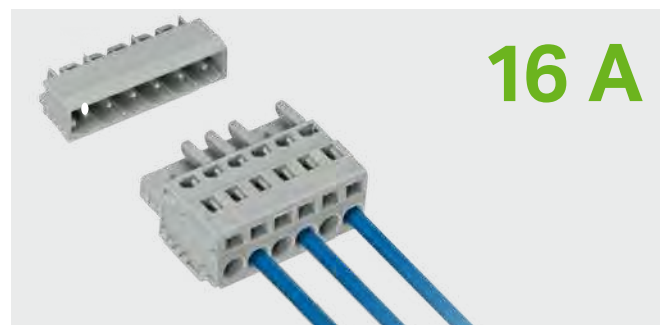

MINI SL

Pin spacing: 3.5 mm

Conductor range: 0.2 mm² ... 1.5 mm²

The **"Low-Profile"** MCS MINI System with Push-in CAGE CLAMP® Connection:

- Extremely low profile – just 7.8 mm
- For wire-to-board connections
- Testing parallel to conductor entry
- Custom coding options
- With integrated push-buttons
- Push-in termination of solid conductors and fine-stranded conductors with ferrules




MINI HD

Pin spacing: 3.5 mm

Conductor range: 0.08 mm² ... 1.5 mm²

The **"Double-Row"** MCS MINI System with CAGE CLAMP® Connection:

- 100% protected against mismatching
- Double-row pole arrangement allows high-density, wire-to-board connectors to be used in very confined spaces
- Custom coding options
- External operating slots are easily accessible – even when wired
- Strain relief plates are available for mounting in center position

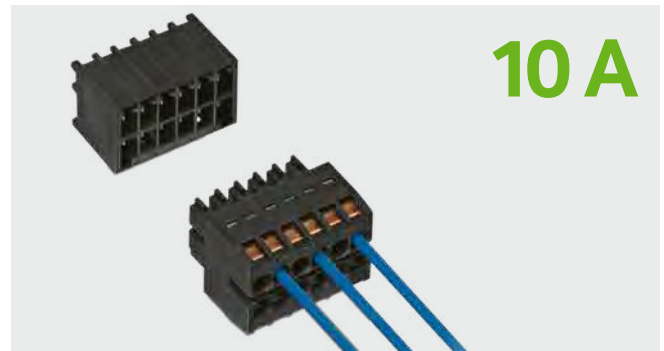


MAXI 6

Pin spacing: 7.62 mm

Conductor range: 0.5 mm² ... 10 mm²

The **"High-Current"** MCS MAXI 6 System with Push-in CAGE CLAMP® Connection:

- 100% protected against mismatching
- Wire-to-board and wire-to-wire connections
- Custom coding options
- 600 V per UL 1059 for standard male and female connectors
- Push-in termination of solid conductors and fine-stranded conductors with ferrules
- Variants with actuation via lever or operating tool

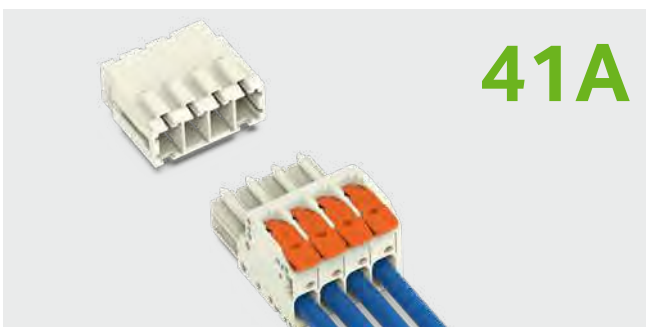


MAXI 16

Pin spacing: 10.16 mm

Conductor range: 0.75 mm² ... 25 mm²

The **"Highest-Performance"** MCS MAXI 16 System with Push-in CAGE CLAMP® Connection:

- Intuitive, tool-free, lever operation
- 100% protected against mismatching
- Wire-to-board and wire-to-wire connections
- Custom coding options
- 600 V per UL 1059 for standard male and female connectors
- Push-in termination of solid conductors and fine-stranded conductors with ferrules

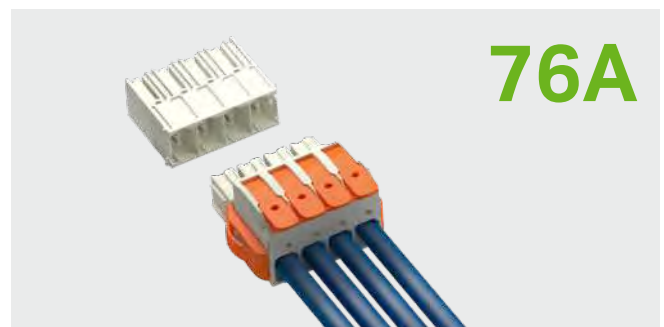

MCS – MULTI CONNECTION SYSTEM

Product Overview Sorted by Pin Spacing

2.5 mm MICRO*	3.5 mm, 3.81 mm MINI 100 % Mismatching Protection				3.5 mm MINI HD*	3.5 mm MINI SL
Female connectors, 733 Series  CAGE CLAMP®	Female connectors, 734 Series  CAGE CLAMP®	Female connectors with locking levers, 734 Series  CAGE CLAMP®	Female connectors with screw flanges, 734 Series  CAGE CLAMP®	Female connectors, 713 Series  CAGE CLAMP®	Female connectors with push-buttons, 714 Series  PUSH-IN CAGE CLAMP®	
0.08 ... 0.5 mm ² / 28 ... 20 AWG 733-106	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-106	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-106/037-000	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-106/107-000	0.08 ... 1.5 mm ² / 28 ... 16 AWG 713-1108	0.2 ... 1.5 mm ² / 24 ... 16 AWG 714-106	
Female connectors with locking levers, 733 Series  CAGE CLAMP®	Female connectors with snap-in mounting feet, 734 Series  CAGE CLAMP®	Female connectors with push-buttons, 2734 Series  PUSH-IN CAGE CLAMP®	Female connectors with push-buttons and locking levers, 2734 Series  PUSH-IN CAGE CLAMP®	Female connectors with levers, 713 Series  CAGE CLAMP®		
0.08 ... 0.5 mm ² / 28 ... 20 AWG 733-106/037-000	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-106/008-000	0.2 ... 1.5 mm ² / 24 ... 14 AWG 2734-106	0.2 ... 1.5 mm ² / 24 ... 14 AWG 2734-106/037-000	0.08 ... 1.5 mm ² / 28 ... 16 AWG 713-1108/037-000		
THT male headers, 733 Series  733-336	Female connectors with push-buttons and mounting flanges, 2734 Series  PUSH-IN CAGE CLAMP®	Female connectors with push-buttons and screw flanges, 2734 Series  PUSH-IN CAGE CLAMP®		Female connectors with screw flanges, 713 Series  CAGE CLAMP®		
	0.2 ... 1.5 mm ² / 24 ... 14 AWG 2734-106/031-000	0.2 ... 1.5 mm ² / 24 ... 14 AWG 2734-106/107-000		0.08 ... 1.5 mm ² / 28 ... 16 AWG 713-1108/107-000		
	THT male headers, 734 Series  734-136	THT male headers with threaded flanges, 734 Series  734-136/108-000	Female connectors, 2734 Series  PUSH-IN CAGE CLAMP®	THT male headers, 713 Series  THR	THT male headers, 714 Series  THR	
THT male headers, 733 Series  733-336/105-604	THT double-deck male headers, 734 Series  734-406	THT male headers, 734 Series  734-135/105-604	Female connectors with locking levers, 2734 Series  PUSH-IN CAGE CLAMP®	THT male headers with levers, 713 Series  THR		
Male connectors, 733 Series  CAGE CLAMP®	Male connectors, 734 Series  CAGE CLAMP®	Male connectors with mounting flanges, 734 Series  CAGE CLAMP®	Male connectors with threaded flanges, 734 Series  CAGE CLAMP®	THT male headers with threaded flanges, 713 Series  THR		
0.08 ... 0.5 mm ² / 28 ... 20 AWG 733-206	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-306	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-306/019-000	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-306/109-000	713-1408/037-000		
	Male connectors with snap-in mounting feet, 734 Series  CAGE CLAMP®	THT female headers, 734 Series  CAGE CLAMP®	THT female headers with locking levers, 734 Series  CAGE CLAMP®			
	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-306/018-000	734-466	734-466/037-00			
	Combi strips, 734 Series  CAGE CLAMP®	Combi strips with snap-in mounting feet, 734 Series  CAGE CLAMP®				
	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-364	0.08 ... 1.5 mm ² / 28 ... 14 AWG 734-366/008-000				

THR Through-hole reflow soldering

3.5 Only available in this pin spacing

*100% protected against mismatching

5 mm MIDI 100 % Mismatch Protection

Female connectors,
721 Series



(CAGE CLAMP®)

Female connectors with
locking levers,
721 Series



(CAGE CLAMP®)

Female connectors with
mounting flanges,
721 Series



(CAGE CLAMP®)

Female connectors with
snap-in mounting feet,
721 Series



(CAGE CLAMP®)

Female connectors,
231 Series



(CAGE CLAMP®)

Female connectors with
integrated end plate,
231 Series



(CAGE CLAMP®)

AMP®

G

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-105/026-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-105/037-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-105/031-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-105/008-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
231-106/026-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
231-106/102-000

Angled female connectors,
722 Series



(CAGE CLAMP®)

Female connectors with flanges
for panel mounting,
721 Series



(CAGE CLAMP®)

Female connectors with snap-in
feet for panel mounting,
721 Series



(CAGE CLAMP®)

Angled female connectors,
232 Series



(CAGE CLAMP®)

Female connectors with
screw flanges,
231 Series



5.08

(CAGE CLAMP®)

0.08 ... 2.5 mm² / 28 ... 12 AWG
722-205/026-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-305/031-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-305/008-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-305/031-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
232-106/026-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
231-306/107-000

Female connectors with
push-buttons,
2721 Series



(PUSH-IN CAGE CLAMP®)

Female connectors with
push-buttons and snap-in
mounting feet,
2721 Series



(PUSH-IN CAGE CLAMP®)

Female connectors with
push-buttons and
locking levers,
2721 Series



(PUSH-IN CAGE CLAMP®)

Female connectors with
push-buttons and
mounting flanges,
2721 Series



(PUSH-IN CAGE CLAMP®)

Female connectors with
push-buttons,
2231 Series



(PUSH-IN CAGE CLAMP®)

Female connectors with
push-buttons and integrated
end and intermediate plate,
2231 Series



(PUSH-IN CAGE CLAMP®)

0.2 ... 2.5 mm² / 24 ... 12 AWG
721-106/026-000

0.2 ... 2.5 mm² / 24 ... 12 AWG
721-106/008-000

0.2 ... 2.5 mm² / 24 ... 12 AWG
721-106/037-000

0.2 ... 2.5 mm² / 24 ... 12 AWG
721-106/031-000

0.2 ... 2.5 mm² / 24 ... 12 AWG
2231-106/026-000

0.2 ... 2.5 mm² / 24 ... 12 AWG
2231-106/102-000

2-conductor female connectors,
721 Series



(PUSH-IN CAGE CLAMP®)

2-conductor female connectors
with locking levers,
721 Series



(PUSH-IN CAGE CLAMP®)

Female connectors with
push-buttons and
screw flanges,
2231 Series



(PUSH-IN CAGE CLAMP®)

2-conductor female connectors,
231 Series



(PUSH-IN CAGE CLAMP®)

0.2 ... 2.5 mm² / 24 ... 12 AWG
721-2106/026-000

0.2 ... 2.5 mm² / 24 ... 12 AWG
721-2106/037-000

0.2 ... 2.5 mm² / 24 ... 12 AWG
231-306/107-000

0.2 ... 2.5 mm² / 24 ... 12 AWG
231-2106/026-000

THT male headers,
721 Series



721-135/001-000

Male connectors,
721 Series



(CAGE CLAMP®)

Male connectors with
snap-in mounting feet,
721 Series



(CAGE CLAMP®)

Male connectors with
mounting flanges,
721 Series



(CAGE CLAMP®)

Male connectors with
snap-in flanges,
721 Series



(CAGE CLAMP®)

Male connectors,
231 Series



(CAGE CLAMP®)

Male connectors with
snap-in mounting feet,
231 Series



(CAGE CLAMP®)

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-605

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-605/018-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-605/019-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
721-606/114-000

0.08 ... 2.5 mm² / 28 ... 12 AWG
231-606

0.08 ... 2.5 mm² / 28 ... 12 AWG
231-606/018-000

THT female headers,
722 Series



722-135

Male connectors for
rail-mount terminal blocks,
721 Series



THT female headers with
locking levers,
722 Series



THT female headers with
mounting flanges,
722 Series



722-135/031-000

Female connectors
for rail-mount terminal blocks
with locking levers,
722 Series



722-135/047-000

Male connectors with snap-in
flanges and threaded flanges,
231 Series



(CAGE CLAMP®)

Double-pin male connectors for
DIN-35 rail mounting,
232 Series



(CAGE CLAMP®)

721-166/003-000

722-136/005-000

722-136/005-000/039-000

232-136/031-000

232-136/047-000

(CAGE CLAMP®)






























The universal connection for solid, stranded and fine-stranded conductors.

To Use: Open the clamping unit, insert conductor, release the clamp.

5 mm, 5.08 mm MIDI Classic			7.5 mm MIDI 100 % Mismatching Protection		
<p>Female connectors with snap-in mounting feet, 231 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 231-106/008-000</p>	<p>Female connectors with locking levers, 231 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 231-106/037-000</p>	<p>Female connectors with mounting flanges, 231 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 231-106/031-000</p>	<p>Female connectors, 721 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 721-205/026-000</p>	<p>Female connectors with snap-in mounting feet, 721 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 721-205/008-000</p>	<p>Female connectors with locking levers, 721 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 721-205/037-000</p>
<p>Female connectors with flanges for panel mounting, 731 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 731-505/031-000</p>	<p>Female connectors with snap-in mounting feet for panel mounting, 731 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 731-505/008-000</p>	<p>Female connectors with push-buttons and mounting flanges, 2231 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 2231-106/031-000</p>	<p>Female connectors with push-buttons, 2721 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 2721-206/026-000</p>	<p>Female connectors with push-buttons and snap-in mounting feet, 2721 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 2721-335/031-000</p>	<p>Female connectors with push-buttons and locking levers, 2721 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 2721-206/037-000</p>
<p>2-conductor female connectors with locking levers, 231 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 231-2106/037-000</p>	<p>2-conductor female connectors with screw flanges, 231 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 231-2306/107-000</p>	<p>THT male headers with threaded flanges, 231 Series</p>  <p>5.08</p>	<p>THT male headers, 721 Series</p>  <p>THR</p>	<p>2-conductor female connectors, 721 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 721-2206/026-000</p>	<p>2-conductor female connectors with locking levers, 721 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 721-2206/037-000</p>
<p>Male connectors with mounting flanges, 231 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 231-606/019-000</p>	<p>Male connectors with snap-in flanges, 231 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 231-606/114-000</p>	<p>Male connectors with threaded flanges, 231 Series</p>  <p>5.08</p> <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 231-636/109-000</p>	<p>Male connectors, 723 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 723-605</p>	<p>Male connectors with snap-in mounting feet, 723 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 723-605/018-000</p>	<p>Male connectors with mounting flanges, 723 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 723-605/019-000</p>
<p>Male connectors for rail-mount terminal blocks, 231 Series</p>  <p>5</p>	<p>Female connectors for rail-mount terminal blocks, 232 Series</p>  <p>5</p>	<p>Female connectors for rail-mount terminal blocks with locking levers, 232 Series</p>  <p>5</p>	<p>THT female headers with locking levers, 722 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 722-735/039-000</p>	<p>THT female headers with mounting flanges, 722 Series</p> 	<p>THT female headers with pacers, 722 Series</p> 
<p>231-166/003-000</p>	<p>232-136/005-000</p>	<p>232-136/005-000/039-000</p>	<p>722-735/039-000</p>	<p>722-735/031-000</p>	<p>722-735/047-000</p>

PUSH-IN CAGE CLAMP®

The universal connection with an additional advantage: Push-in
To use: Open the clamping unit, insert conductor, release the clamp.

7.5 mm, 7.62 mm MIDI Classic			7.62 mm MAXI 6		10.16 mm MAXI 16
<p>Female connectors, 831 Series</p>  <p>CAGE CLAMP®</p> <p>3 ... 2.5 mm² / 28 ... 12 AWG 231-206/026-000</p>	<p>Female connectors with snap-in mounting feet, 231 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 231-206/008-000</p>	<p>Female connectors with locking levers, 231 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 231-206/037-000</p>	<p>Female connectors, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3104</p>	<p>Female connectors with levers, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-1104</p>	<p>Female connectors with levers, 832 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.75 ... 25 mm² / 18 ... 4 AWG 832-1104</p>
<p>Female connectors with mounting flanges, 831 Series</p>  <p>CAGE CLAMP®</p> <p>3 ... 2.5 mm² / 28 ... 12 AWG 231-206/031-000</p>	<p>Angled female connectors, 732 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 732-106/026-000</p>	<p>Female connectors with flanges or snap-in mounting feet for panel mounting, 731 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 731-535/031-000</p>	<p>Female connectors with locking levers, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3104/037-000</p>	<p>Female connectors with levers and locking levers, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-1104/038-000</p>	<p>Female connectors with levers and locking levers, 832 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.75 ... 25 mm² / 18 ... 4 AWG 832-1104/037-000</p>
<p>Female connectors with push-buttons, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>3 ... 2.5 mm² / 24 ... 12 AWG 831-206/031-000</p>	<p>Female connectors with push-buttons and snap-in mounting feet, 2231 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 2231-106/026-000</p>	<p>Female connectors with push-buttons and locking levers, 2231 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 2231-535/031-000</p>	<p>Female connectors with screw flanges, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3104/107-000</p>	<p>Female connectors with levers and center locking levers, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-1104/322-000</p>	<p>Female connectors with levers and center locking levers, 832 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.75 ... 25 mm² / 18 ... 4 AWG 832-1104/322-000</p>
<p>Female connectors with push-buttons and mounting flanges, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>3 ... 2.5 mm² / 24 ... 12 AWG 831-206/031-000</p>	<p>2-conductor female connectors, 231 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 231-2206/026-000</p>	<p>2-conductor female connectors with locking levers, 231 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 231-2206/037-000</p>	<p>Female connectors with levers and mounting adapters, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-1104/306-000</p>	<p>Male connectors with threaded flanges, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3204/109-000</p>	<p>Female connectors with levers and mounting adapters, 832 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.75 ... 25 mm² / 18 ... 4 AWG 832-1104/306-000</p>
<p>THT male headers, 831 Series</p>  <p>CAGE CLAMP®</p> <p>3 ... 2.5 mm² / 24 ... 12 AWG 831-206/031-000</p>	<p>THT male headers with mounting flanges, 231 Series</p>  <p>CAGE CLAMP®</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 231-2206/026-000</p>	<p>THT male headers, 231 Series</p>  <p>THR</p> <p>0.2 ... 2.5 mm² / 24 ... 12 AWG 231-2206/037-000</p>	<p>Female connectors with levers and mounting adapters, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-1104/038-000/306-000</p>	<p>THT male headers, 831 Series</p>  <p>CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3204/109-000</p>	<p>Female connectors with levers and mounting adapters, 832 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.75 ... 25 mm² / 18 ... 4 AWG 832-1104/037-000/306-000</p>
<p>Female connectors, 831 Series</p>  <p>CAGE CLAMP®</p> <p>3 ... 2.5 mm² / 28 ... 12 AWG 831-606</p>	<p>Male connectors with snap-in mounting feet, 731 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 731-606/018-000</p>	<p>Male connectors with mounting flanges, 731 Series</p>  <p>CAGE CLAMP®</p> <p>0.08 ... 2.5 mm² / 28 ... 12 AWG 731-606/019-000</p>	<p>THT male headers, 831 Series</p>  <p>CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3604</p>	<p>THT female headers, 831 Series</p>  <p>CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3504</p>	<p>THT male headers, 832 Series</p>  <p>CAGE CLAMP®</p> <p>0.75 ... 25 mm² / 18 ... 4 AWG 832-3604</p>
<p>Female connectors with push-in flanges, 831 Series</p>  <p>CAGE CLAMP®</p> <p>3 ... 2.5 mm² / 28 ... 12 AWG 831-606/114-000</p>	<p>Double-pin male connectors for DIN-35 rail mounting, 232 Series</p>  <p>CAGE CLAMP®</p> <p>0.232 ... 566/007-000</p>	<p>THT female headers, 232 Series</p>  <p>CAGE CLAMP®</p> <p>232-736</p>	<p>Male connectors, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3204</p>	<p>Male connectors with levers, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-1204</p>	<p>Male connectors with levers, 832 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.75 ... 25 mm² / 18 ... 4 AWG 832-1204</p>
<p>THT female headers with locking levers, 831 Series</p>  <p>CAGE CLAMP®</p> <p>232-736/039-000</p>	<p>THT female headers with mounting flanges, 232 Series</p>  <p>CAGE CLAMP®</p> <p>232-736/031-000</p>	<p>THT female headers with spacers, 232 Series</p>  <p>CAGE CLAMP®</p> <p>232-736/047-000</p>	<p>Male connectors for mounting on DIN-35 rail, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-3204/007-000</p>	<p>Male connectors with levers and mounting adapters, 831 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.5 ... 10 mm² / 20 ... 8 AWG 831-1204/306-000</p>	<p>Male connectors with levers and mounting adapters, 832 Series</p>  <p>PUSH-IN CAGE CLAMP®</p> <p>0.75 ... 25 mm² / 18 ... 4 AWG 832-1204/306-000</p>

Terminate both solid and ferruled conductors by simply pushing them in – no operating tool needed.