



BAS85

DIODE

SMALL SIGNAL SCHOTTKY DIODE


DESCRIPTION

The UTC **BAS85** is a small signal schottky diode, it uses UTC's advanced technology to provide customers with low forward voltage and high breakdown voltage, etc.

The UTC **BAS85** is suitable for general purpose applications.

FEATURES

- * High breakdown voltage
- * Low forward voltage
- * Fast switching

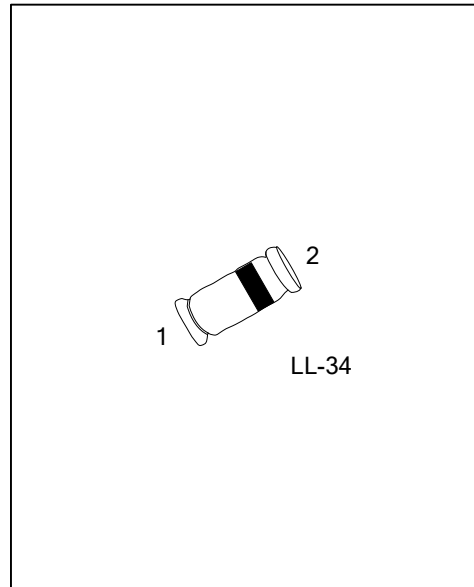

ORDERING INFORMATION

Ordering Number	Package	Pin Assignment		Packing
		1	2	
BAS85G-LL34-R	LL-34	A	K	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

<p>BAS85G-LL34-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) LL34: LL-34 (3) G: Halogen Free and Lead Free
--	--

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Continuous Reverse Voltage	V_R	30	V
Continuous Forward Current @ $T_A=25^\circ\text{C}$ (Note 1)	I_F	200	mA
Peak Forward Current @ $T_A=25^\circ\text{C}$ (Note 1)	I_{FM}	300	mA
Non-Repetitive Peak Forward Current @ $t_p < 1\text{s}$, $T_A=25^\circ\text{C}$ (Note 1)	I_{FSM}	5	A
Power Dissipation @ $T_A=65^\circ\text{C}$ (Note 1)	P_D	200	mW
Junction Temperature	T_J	125	$^\circ\text{C}$
Operating Ambient Temperature	T_A	-55~+125	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~+150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient (Note 1)	θ_{JA}	430	$^\circ\text{C/W}$


■ ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Breakdown Voltage	V_R		30			V
Forward Voltage (Note 2)	V_F	$I_F=0.1\text{mA}$			0.24	V
		$I_F=1\text{mA}$			0.32	V
		$I_F=10\text{mA}$			0.4	V
		$I_F=30\text{mA}$		0.5		V
		$I_F=100\text{mA}$			0.8	V
Leakage Current	I_R	$V_R=25\text{V}$			2.0	μA
Reverse Recovery Time	t_{rr}	$I_F=10\text{mA}, I_R=10\text{mA}, I_R=1\text{mA}$			5	ns
Junction Capacitance	C_J	$f=1\text{MHz}, V_R=1\text{V}$			10	pF


Notes: 1. Valid provided that leads at a distance of 4mm from case are kept at ambient temperature
 2. Pulsed test: $t_p < 300\mu\text{s}$; $\delta < 2\%$.

TYPICAL CHARACTERISTICS


Admissible Power Dissipation vs. Ambient Temperature

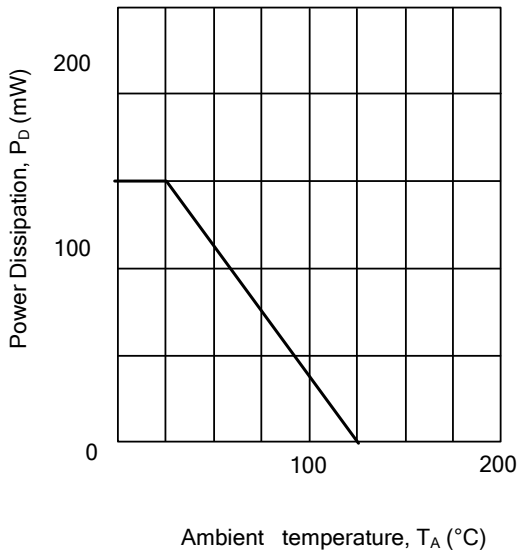


Typical Instantaneous Forward Characteristics

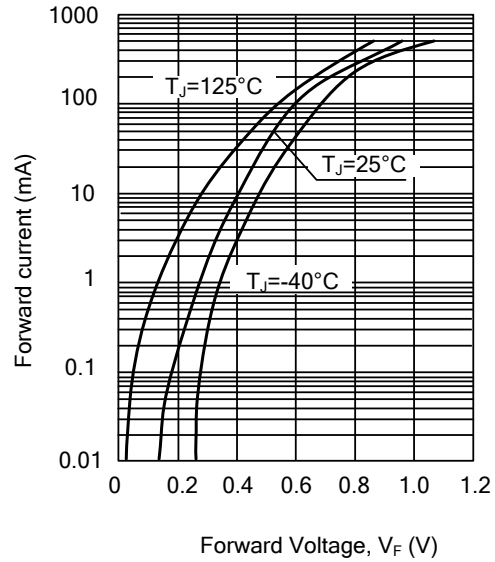

Typical Reverse Characteristics

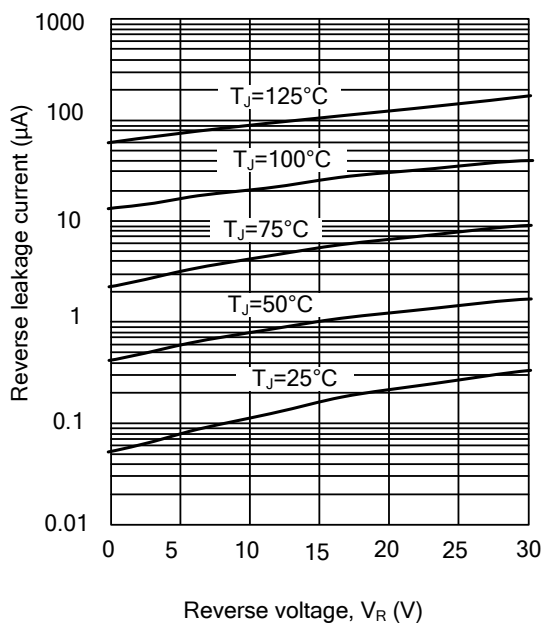

Typical Junction Capacitance

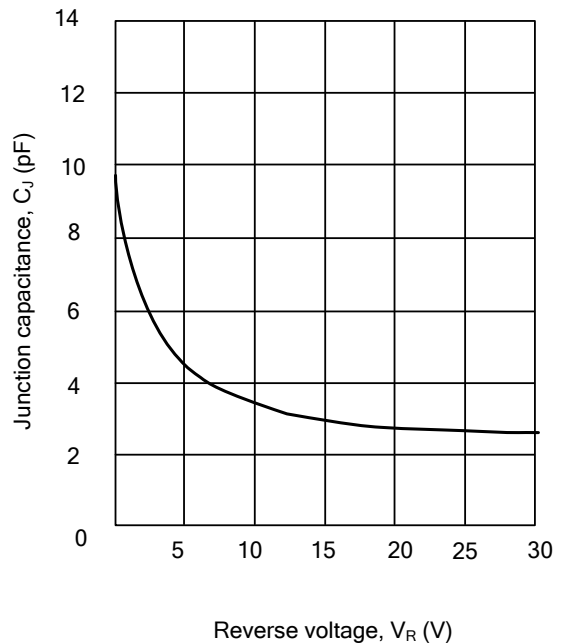

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.