


## FEATURES

- Wide Operating Voltage Range of 3.0V to 18.0V
- Maximum Input Current of 1 $\mu$ A at 18V over Full Package-Temperature range, 100nA at 18V and 25°C
- Standardized Symmetrical Output Characteristics
- Noise Margin
  - 1.0V min @ 5.0V supply
  - 2.0V min @ 10.0V supply
  - 2.5V min @ 15.0V supply

## DESCRIPTION

The CD4081B consist of four AND gate circuits. Each circuit functions as a two-input AND gate. The outputs are fully buffered for highest noise immunity and pattern insensitivity to output impedance variations. It operates over a recommended  $V_{DD}$  power supply range of 3V to 15V referenced to  $V_{SS}$ . Unused inputs must be connected to  $V_{DD}$ ,  $V_{SS}$ , or another input. Unused outputs must be left open.

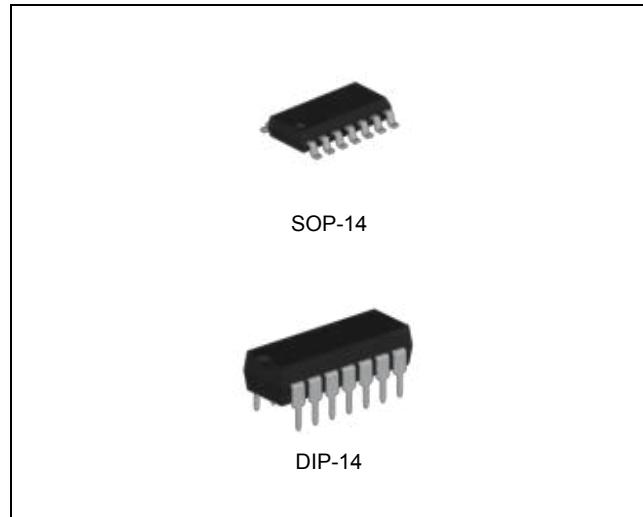

## ORDERING INFORMATION

Device	Package
CD4081BD	SOP-14
CD4081BN	DIP-14

## ABSOLUTE MAXIMUM RATINGS (Note 1)

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
DC Supply Voltage (Referenced to $V_{SS}$ )	$V_{DD}$	-0.5	20	V
DC Input Voltage (Referenced to $V_{SS}$ )	$V_{IN}$	-0.5	$V_{DD} + 0.5$	V
DC Input Current	$I_{IN}$	-	$\pm 10$	mA
Maximum Junction Temperature	$T_J$	-	150	°C
Storage Temperature	$T_{STG}$	-65	150	°C

Note1. Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

# CMOS Quad 2-Input AND Gates

CD4081B

## RECOMMENDED OPERATING CONDITIONS (Note 2)

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	$V_{DD}$	3	18	V
DC Input Voltage	$V_{IN}$	0	$V_{DD}$	V
DC Output Voltage	$V_{OUT}$	0	$V_{DD}$	V
Operating Free-Air Temperature Range	$T_A$	-55	125	°C

Note 2. The device is not guaranteed to function outside its operating ratings.

## ORDERING INFORMATION

Package	Order No.	Description	Supplied As	Status
SOP-14	CD4081BD	Quad 2-Input AND Gate	Tape & Reel	Active
DIP-14	CD4081BN	Quad 2-Input AND Gate	Tube	Active

# CMOS Quad 2-Input AND Gates

CD4081B


## PIN CONFIGURATION

SOP-14		DIP-14	
1A	1	14	VDD
1B	2	13	4B
1Y	3	12	4A
2Y	4	11	4Y
2A	5	10	3Y
2B	6	9	3B
VSS	7	8	3A

## PIN DESCRIPTION

Pin No.		Pin Name	Pin Function
SOP-14	DIP-14		
1	1	1A	Input 1A
2	2	1B	Input 1B
3	3	1Y	Output 1
4	4	2Y	Output 2
5	5	2A	Input 2A
6	6	2B	Input 2B
7	7	VSS	Ground
8	8	3A	Input 3A
9	9	3B	Input 3B
10	10	3Y	Output 3
11	11	4Y	Output 4
12	12	4A	Input 4A
13	13	4B	Input 4B
14	14	VDD	Power Supply

## **BLOCK DIAGRAM**

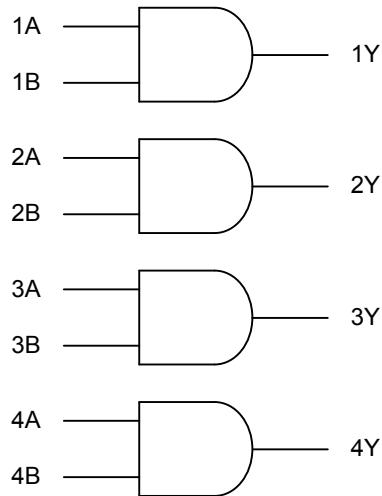

## DC ELECTRICAL CHARACTERISTICS

Voltages referenced to V<sub>SS</sub>.

SYMBOL	PARAMETER	TEST CONDITION	V <sub>DD</sub>	Limit			UNIT	
				-55°C	25°C	125°C		
V <sub>IH</sub>	Minimum High-Level Input Voltage	V <sub>OUT</sub> = 0.5V or V <sub>DD</sub> - 0.5V	5 V	3.5	3.5	3.5	V	
		V <sub>OUT</sub> = 1.0V or V <sub>DD</sub> - 1.0V	10 V	7	7	7		
		V <sub>OUT</sub> = 1.5V or V <sub>DD</sub> - 1.5V	15 V	11	11	11		
V <sub>IL</sub>	Maximum Low-Level Input Voltage	V <sub>OUT</sub> = 0.5V	5 V	1.5	1.5	1.5	V	
		V <sub>OUT</sub> = 1.0V	10 V	3	3	3		
		V <sub>OUT</sub> = 1.5V	15 V	4	4	4		
V <sub>OH</sub>	Minimum High-Level Output Voltage	V <sub>IN</sub> = V <sub>DD</sub>	5 V	4.95	4.95	4.95	V	
			10 V	9.95	9.95	9.95		
			15 V	14.95	14.95	14.95		
V <sub>OL</sub>	Maximum Low-Level Output Voltage	V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub>	5 V	0.05	0.05	0.05	V	
			10 V	0.05	0.05	0.05		
			15 V	0.05	0.05	0.05		
I <sub>IN</sub>	Maximum Input Leakage Current	V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub>	18 V	±0.1	±0.1	±1.0	µA	
I <sub>CC</sub>	Maximum Quiescent Supply Current	V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub>	5 V	0.25	0.25	7.5	µA	
			10 V	0.5	0.5	15		
			15 V	1.0	1.0	30		
			20 V	5.0	5.0	150		
I <sub>OL</sub>	Minimum Output Low (Sink) Current	V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub>	V <sub>OL</sub> = 0.4V	5 V	0.64	0.51	0.36	mA
			V <sub>OL</sub> = 0.5V	10 V	1.6	1.3	0.9	
			V <sub>OL</sub> = 1.5V	15 V	4.2	3.4	2.4	
I <sub>OH</sub>	Minimum Output High (Source) Current	V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub>	V <sub>OH</sub> = 2.5V	5 V	-2.0	-1.6	-1.15	mA
			V <sub>OH</sub> = 4.6V	5 V	-0.64	-0.51	-0.36	
			V <sub>OH</sub> = 9.5V	10 V	-1.6	-1.3	-0.9	
			V <sub>OH</sub> = 13.5V	15 V	-4.2	-3.4	-2.4	

**AC ELECTRICAL CHARACTERISTICS**

$C_L = 50 \text{ pF}$ ,  $R_L = 200\text{k}\Omega$ , Input  $t_r = t_f = 20 \text{ ns}$

SYMBOL	PARAMETER	VDD	Limit			UNIT
			-55°C	25°C	125°C	
$t_{PLH}$ , $t_{PHL}$	Maximum Propagation Delay, Input A or Input B to Output Y (Figure 1)	5 V	250	250	500	ns
		10 V	120	120	240	
		15 V	90	90	180	
$t_{TLH}$ , $t_{THL}$	Maximum Output Transition Time, Any Output (Figure 1)	5 V	200	200	400	ns
		10 V	100	100	200	
		15 V	80	80	160	
$C_{IN}$	Maximum Input Capacitance	—		7.5		pF

## FUNCTION TABLE

Input (A)	Input (B)	Output (Y)
L	L	L
L	H	L
H	L	L
H	H	H

## SWITCHING CHARACTERISTICS

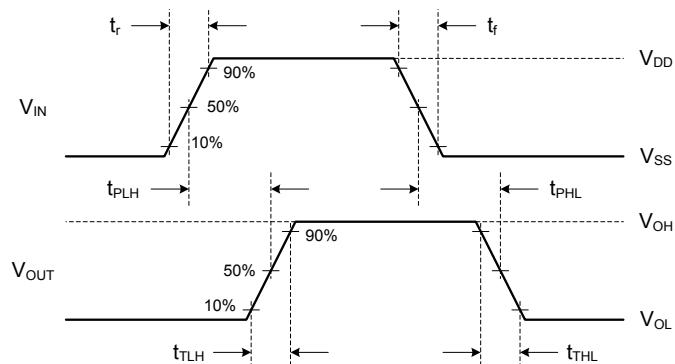


Fig. 1. Switching Time Waveforms

**TYPICAL OPERATING CHARACTERISTICS**

T.B.D.

**REVISION NOTICE**

The description in this datasheet is subject to change without any notice to describe its electrical characteristics properly.