



# STRAIGHT HEAD

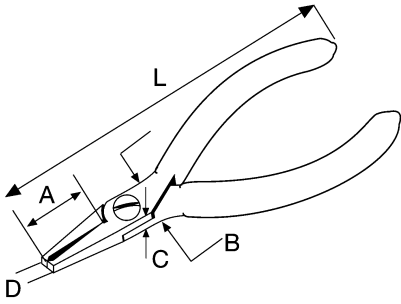

## STRAIGHT HEAD


Main applications:  
for vertical use.

**LENGTH 4.75" (120 MM)**




MODEL	L	A	B	C	D	MAX. Cu	WGT.	DESCRIPTION
573E	4.75" (120 mm)	0.91" (23 mm)	0.35" (9 mm)	0.26" (6.5 mm)	0.14" (3.5 mm)	∅ 0.02" (0.6 mm)	2.36 oz. (67 g)	Vertical, flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable  Tip cutter for vertical tip cutting. For fine wires.


# ANGLED HEAD SMALL ERGONOMIC HANDLES\*



## ANGLED HEAD SMALL

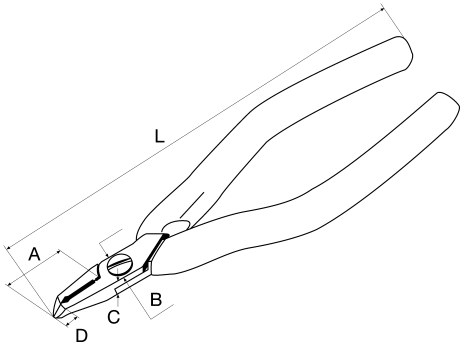

**LENGTH 5.5" (140 MM)**



MODEL	L	A	B	C	D	MAX. Cu	WGT.	DESCRIPTION
2282E	5.5" (140 mm)	0.79" (20 mm)	0.39" (10 mm)	0.23" (5.8 mm)	0.28" (7 mm)	∅ 0.04" (1.0 mm)	2.47 oz. (70 g)	< 45°, flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable, ergonomic  Ergonomic tip cutter. Medium size. Ideal for working on PCB's or cutting component leads.

\*Ergonomic features see page 13