


RELIEVED HEAD


LENGTH 4.33" (110 MM)



MODEL	L	A	B	C	MAX. Cu	WEIGHT	DESCRIPTION
776E	4.33" (110 mm)	0.35" (9 mm)	0.35" (9 mm)	0.24" (6 mm)	∅ 0.04" (1.0 mm)	1.69 oz. (48 g)	Super full flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable Miniature side cutter. Super fine relieved head allows very good access. Soft wires only.
777E	4.33" (110 mm)	0.35" (9 mm)	0.35" (9 mm)	0.24" (6 mm)	∅ 0.04" (1.0 mm)	1.69 oz. (48 g)	Super full flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable Small tapered head for cutting in limited access areas. Perfect full flush cut. Soft wires only.
632NCF	4.33" (110 mm)	0.35" (9 mm)	0.35" (9 mm)	0.24" (6 mm)	* ask for cutting cap.	1.69 oz. (48 g)	Super full flush cut, high grade tool steel, anti-glare finish, ESD safe, soft materials only Miniature side cutter. Special fine, high precision cut exclusively designed for soft materials like small Silicone tubing in medical applications, precision connector sealing, miniature rubber gaskets or cutting of molded soft synthetic parts. Super fine relieved head allows very good access.

* Please provide wire sample.


LENGTH 4.5" (115 MM)

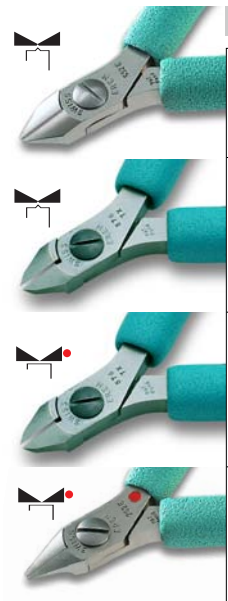

MODEL	L	A	B	C	MAX. Cu	WEIGHT	DESCRIPTION
592E	4.5" (115 mm)	0.47" (12 mm)	0.41" (10.5 mm)	0.26" (6.5 mm)	∅ 0.02" (0.6 mm)	2.36 oz. (67 g)	Flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable Side cutter with relieved head. Medium size. For Copper wires.
576TX	4.5" (115 mm)	0.43" (11 mm)	0.41" (10.5 mm)	0.26" (6.5 mm)	* ask for cutting cap.	2.36 oz. (67 g)	Flush cut, Tungsten Carbide blades, anti-glare ESD safe Miniature side cutter. Super fine relieved head allows very good access. Tungsten Carbide blades for consistent quality cuts. Resistant to small stainless steel wires.
576TX1	4.5" (115 mm)	0.51" (13 mm)	0.41" (10.5 mm)	0.26" (6.5 mm)	∅ 0.02" (1.0 mm)	2.36 oz. (67 g)	Flush cut, Tungsten Carbide blades, anti-glare ESD safe Similar to 576TX but with rounded tips. Designed specifically for cutting MP35N stainless steel wire. Medical device manufacturing applications. Tungsten carbide blades for consistent quality cuts.
792E	4.5" (115 mm)	0.51" (13 mm)	0.41" (10.5 mm)	0.26" (6.5 mm)	∅ 0.02" (1.0 mm)	2.36 oz. (67 g)	Super full flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable Side cutter with relieved head. Medium size. For fine soft wires.

* Please provide wire sample.

LENGTH 5.5" (140 MM)



MODEL	L	A	B	C	MAX. Cu	WEIGHT	DESCRIPTION
2222EB	5.5" (140 mm)	0.39" (10 mm)	0.39" (10 mm)	0.23" (5.8 mm)	∅ 0.04" (1.0 mm)	2.47 oz. (70 g)	Flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable, ergonomic Ergonomic side cutter for universal use. Tapered relieved head for working in confined areas.