




# STRAIGHT TAPERED HEAD

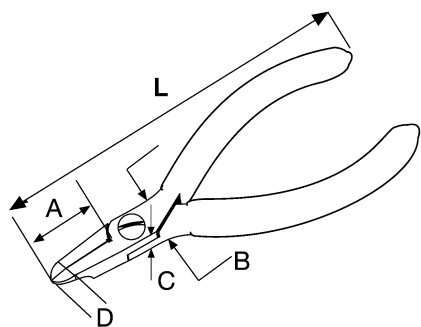

ANGLED HEAD SMALL

Main applications:  
for horizontal use and  
easier access.

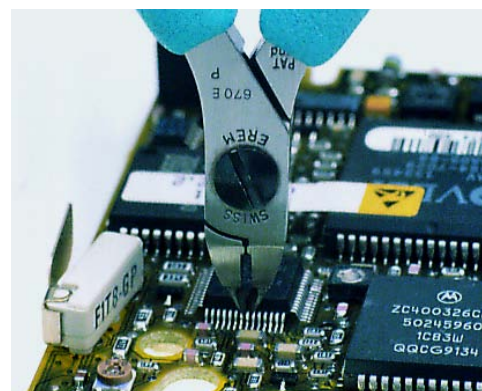

LENGTH 4.33" (110 MM)



MODEL	L	A	B	C	D	MAX. Cu	WGT.	DESCRIPTION
670EP	4.33" (110 mm)	0.39" (10 mm)	0.35" (9 mm)	0.24" (6 mm)	0.08" (2 mm)	∅ 0.01" (0.25 mm)	1.69 oz. (48 g)	Vertical tip cutter, flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable  Miniature tip cutter. High precision SMD lead cutting. Micro-packages up to 0.25 fine pitches before desoldering. No breakage guarantee.  For μ-pitches under 0,5 mm use 670 EPF

LENGTH 4.75" (120 MM)



MODEL	L	A	B	C	D	MAX. Cu	WGT.	DESCRIPTION
570E	4.75" (120 mm)	0.87" (22 mm)	0.35" (9 mm)	0.26" (6.5 mm)	0.16" (4 mm)	∅ 0.02" (0.6 mm)	2.36 oz. (67 g)	Flush cut, high grade tool steel, anti-glare finish, ESD safe, resharpenable  Tip cutter for horizontal or vertical tip cutting. For cutting at extreme tips.

# Erem®