


Datasheet

Art.No. 37.702.7453.0

Initiator terminal WKF 1.5 KOI 3L

Initiator terminal block with spring clamp connection for mounting on connection module, nominal cross section 1.5 mm², width 5 mm, color gray

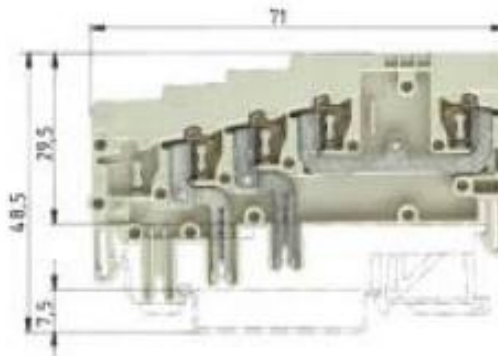

Art.No.	37.702.7453.0
EAN	4015573550797
Order unit	50 pieces

Approvals



Technical data

General

Nominal cross section	1.5 mm ²
Colour	Grey
Number of levels	3
Number of clamp positions per level	1
Width/grid dimension	5 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V2
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated current	10 A
Rated voltage	65 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	71 mm

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	0.14 mm ²

Maximum cross section solid	1.5 mm ²
Minimum cross section fine stranded	0.14 mm ²
Maximum cross section fine stranded	1.5 mm ²
Wire strip length	10 mm

Technical Data UL/CSA

Cross section UL	28-16 AWG
Voltage UL	65 V
Current factory wiring	10 A
Current field wiring	10 A
Cross section CSA	28-16 AWG
Voltage CSA	65 V
Current CSA	10 A

Note

Display	None
Power supply function	No

Classification

ECLASS 8.1	27141128: Sensor/actuator terminal block
ETIM 5.0	EC000900: Sensor/actuator terminal block
ETIM 4.0	EC000900: Sensor/actuator terminal block
ETIM 3.0	EC000900: Sensor/actuator terminal block

Accessories / components

Art.No.:	Type:	Description
98.300.0000.0	Mounting rail TS 35x7,5 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1000.0	Mounting rail TS 35x7,5 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1900.0	Mounting rail TS 35x7,5 PERF 25mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0000.0	Mounting rail TS 35x15-2,3 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0004.0	Mounting rail TS 35x15-2,3 UNPERF FZN - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel, hot galvanized
98.370.0000.0	Mounting rail TS 35x15 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.370.1000.0	Mounting rail TS 35x15 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.380.0000.0	Mounting rail TS 35x15-2,3 UNPERF CU - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material E copper
Z5.522.7453.0	End bracket 9708 / S35	End clamp for mounting rail TS 35
Z5.522.8553.0	End bracket 9708 / 2 S 35	End clamp for mounting rail TS 35
Z5.523.5653.0	End bracket WE 2/U	End clamp for mounting rail TS 35 and TS 32
Z5.523.5753.0	End bracket WE 1/U	End clamp for mounting rail TS 35 and TS 32
Z5.523.9353.0	End bracket WEF 1/35	End clamp, schraubenlos for mounting rail TS 35

Drawings

